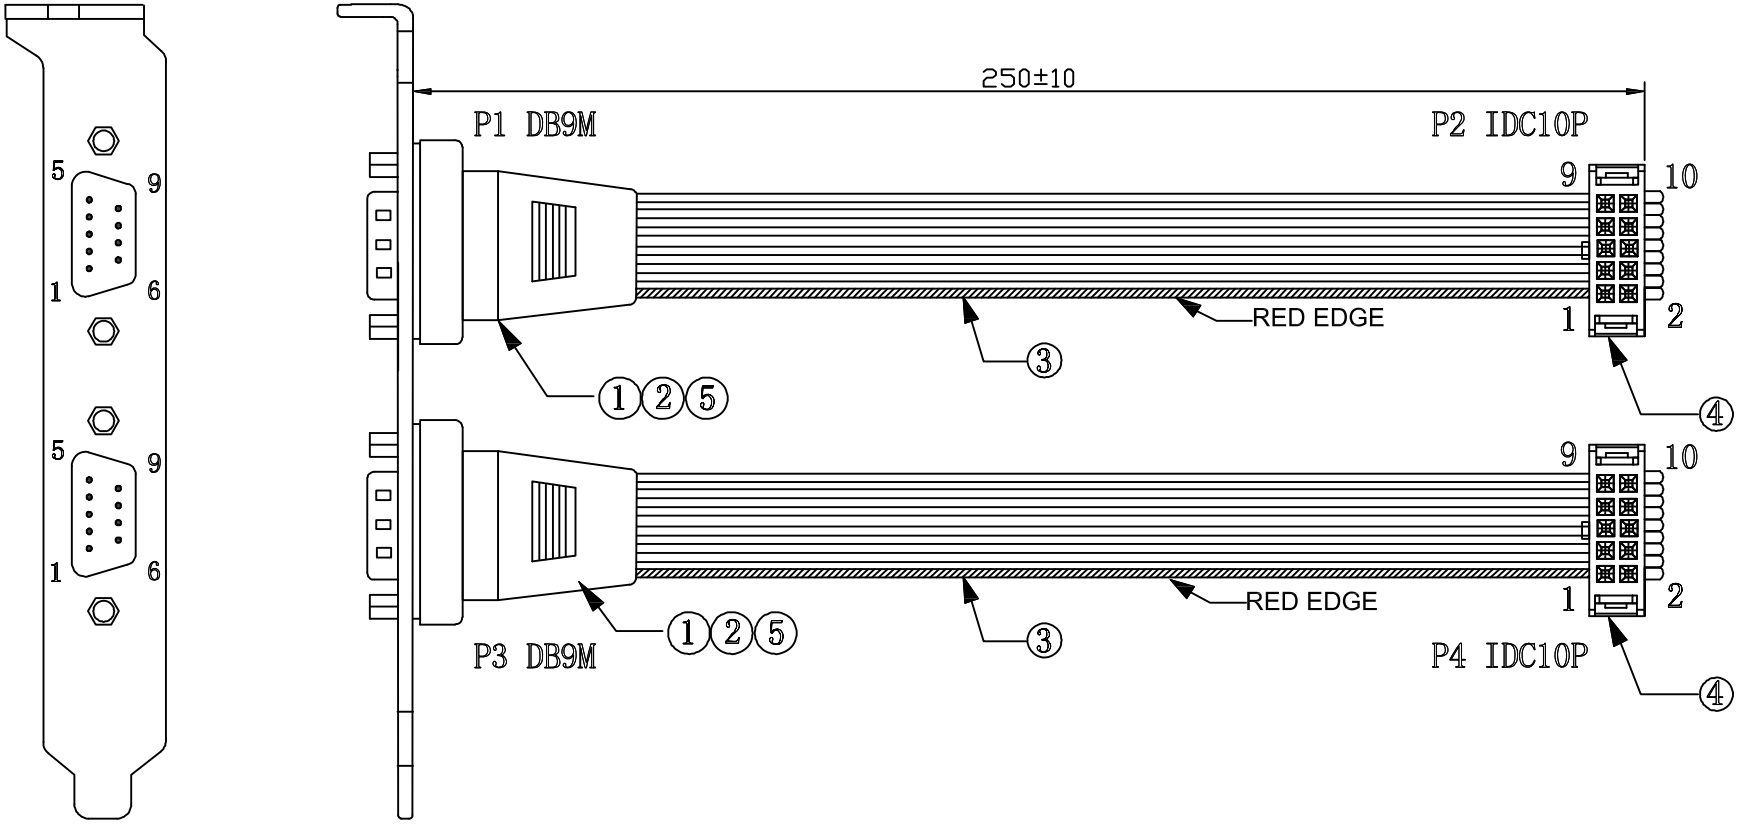


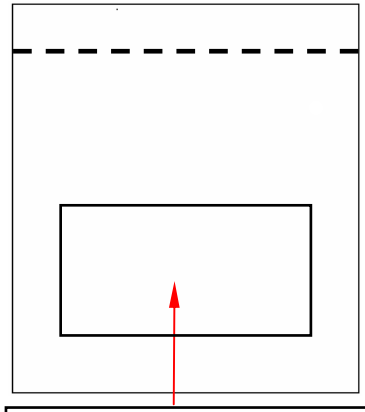

AK3328 0.25M

BRACKET WITH DOUBLE SERIAL DB 09 CONNECTOR M

15000.001-XXXXXX

| P1 | P2 |
|---|---|
| 1 | 1 |
| 6 | 2 |
| 2 | 3 |
| 7 | 4 |
| 3 | 5 |

| P1 | P2 |
|---|---|
| 8 | 6 |
| 4 | 7 |
| 9 | 8 |
| 5 | 9 |

| P3 | P4 |
|---|---|
| 1 | 1 |
| 6 | 2 |
| 2 | 3 |
| 7 | 4 |
| 3 | 5 |

| P3 | P4 |
|---|---|
| 8 | 6 |
| 4 | 7 |
| 9 | 8 |
| 5 | 9 |

NOTE:

1. ELECTRICAL TEST:

<1>. 100% OPEN SHORT & MISS WIRE TEST.

<2>. Min. INSULATION RESISTANCE:Min. DC300V 2Mohm.

<3>. Max. CONDUCTOR RESISTANCE: 10ohm.

| ITEM | NAME | SPECIFICATION | COLOUR | MATERIAL | QTY | SIZE | REMARK |
|---|---|---|---|---|---|---|---|
| ⑤ | SCREW | SCREW SCREW NUTS | Gray | 65P PVC | 4PCS | | |
| ④ | PIN OF PLUG | BLACK THREE PIECES WITH NOSE | Black | Iron cross nickel | 2PCS | | |
| ③ | CORD SPECIFICATION | UL2651 28AWG/9C;PH2.54 OD=0.9*11.4. | Gray | 65P PVC | 2PCS | 270MM | |
| ② | TYPE OF PLUG | DKN BIACK DB9 SHELL | Black | ABS | 1SET | | |
| ① | PIN OF PLUG | DB9P M Terminal | Blue | Iron cross nickel | 2PCS | | |

| | | | | |
|---|---|---|---|---|
| Tolerance unless otherwise specified | Linear | 0.00± | Model name: DB9P M to IDC 2.54 10P cable. | |
| | Angles | ± ° | Customer No.: AK3328 | |
| Size :A4 | Unit:mm | Rev:A | Approved By | Date |
| Scale:1:1 | | | | 2013-09-16 |